



Steel City[®] EMT Raintight Fittings

NEW!

Go For The Gold!

Thomas & Betts is pleased to announce its new UL listed raintight compression EMT Fitting. Easily identified by the trademark gold-colored gland nut, the patent-pending design ensures a quality UL listed raintight connection. For sizes up to 1", there are no additional parts to potentially lose and require **no** disassembly to install. In your next wet location project, look for the distinctive gold color on the gland to ensure you're using the approved Steel City[®] raintight fitting from Thomas & Betts.

Steel City[®] Raintight EMT Compression Fittings include these features:

- Patent-pending design includes a sealing ring ensuring a 360° raintight seal
- Distinctive fitting design and gland nut color enables inspectors to visually inspect conformance from a distance - no close-up inspection required
- All-steel construction for rugged, durable installations
- Sharp teeth on locknuts ensure a solid bond and tight grip on surface of enclosure
- Does not require disassembly to install!

The distinctive gold gland nut makes for easy inspection, even from a distance.



Steel City[®] Raintight EMT Compression Fittings feature a distinctive design and vibrant gland nut color, enabling inspectors to visually inspect conformance from a distance. There's no close-up inspection required!



Technical Information

Materials, Specifications

Material: Steel Body, Steel Locknut
Plating: Zinc Plated, Clear Chromate Coating
Liner: Nylon (for insulated fittings)
Threads: Male hub threads NPS
Gaskets: Neoprene® (black) *Sold Separately*
Use: Raintight, wet locations, concretetight

Third Party Certification



UL Listed: E-16592 Listed Raintight

Third Party Standards

UL Standard: 514B
 NEMA: FB-1



Look for the trademark **Gold** gland nut to ensure proper approval for raintight applications

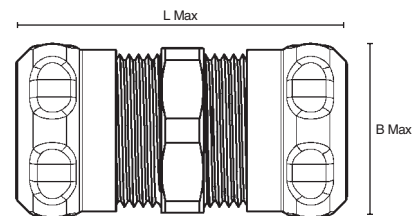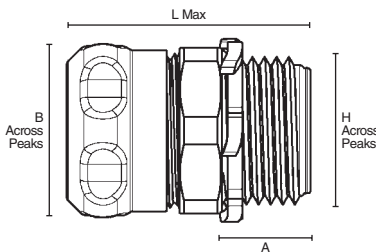

Steel City® EMT Raintight Conduit Fittings

Size	Catalog No.	A	B	H	L	Pkg. Qty.	UPC Number
Non-Insulated Compression Connectors							
1/2"	TC111A-RT	.510	1.097	1.052	1.425	50	785991-03428
3/4"	TC112A-RT	.510	1.305	1.295	1.425	50	785991-03429
1"	TC113A-RT	.675	1.645	1.580	1.652	25	785991-03430
Insulated Compression Connectors							
1/2"	TC711A-RT	.510	1.097	1.052	1.425	50	785991-03438
3/4"	TC712A-RT	.510	1.305	1.295	1.425	50	785991-03439
1"	TC713A-RT	.675	1.645	1.580	1.652	25	785991-03440

Size	Catalog No.	L	B	Pkg. Qty.	UPC Number
Compression Couplings					
1/2"	TK111A-RT	1.660	1.097	50	785991-03449
3/4"	TK112A-RT	1.660	1.305	50	785991-03450
1"	TK113A-RT	1.934	1.645	25	785991-03451
Sealing Gaskets* (sold separately)					
1/2"	SR-101			50	785991-44001
3/4"	SR-102			50	785991-44003
1"	SR-103			50	785991-44005

• Contact T&B Technical Services for a complete report detailing testing and competitive analysis.

* **Gaskets sold separately.** In some jurisdictions, sealing gaskets are not required when installed in a threaded opening. Also, a connector assembled in the bottom of a box or enclosure may be considered by code "to be located (placed) so that water will not enter the enclosure at the knockout interface" (NEC 314.15 (A)). In this instance, the sealing O-ring may not be required. Consult with the local authority having jurisdiction.

Neoprene is a trademark of DuPont Dow Elastomers L.L.C.



Please ask your Thomas & Betts Sales Representative for a complete catalog of quality T&B® Fittings products or visit us at www.tnb.com. For customer service, 1-800-816-7809. For technical questions, call 1-888-826-3289.

Thomas & Betts Corporation
 Electrical Division
 8155 T&B Boulevard
 Memphis, TN 38125
 901-252-5000

Thomas & Betts Ltd.
 700 Thomas Avenue
 Iberville, Québec J2X 2M9
 450-347-5318