


## Electrical metallic tubing (EMT) fittings

### Combination compression couplings

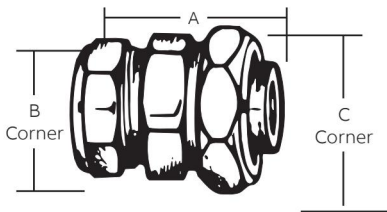


#### Features and benefits:

- Raintight

#### Combination compression couplings – Heavywall to Liquidtight flexible metal conduit – steel – zinc plated

Cat. No.	Conduit Size (in.)	Dimensions (in.)			Std. Ctn.
		A	B	C	
LTH 111	½ rigid to ½ liquidtight	1 <sup>7</sup> / <sub>8</sub>	1 <sup>1</sup> / <sub>8</sub>	1 <sup>1</sup> / <sub>8</sub>	100

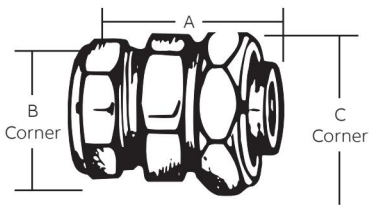

#### Features and benefits:

- Raintight


#### Combination compression couplings – Thinwall to Liquidtight flexible metal conduit – steel – zinc plated

Cat. No.	Conduit Size (in.)	Dimensions (in.)			Std. Ctn.
		A	B	C	
LTT 111	½ EMT to ½ liquidtight	1 <sup>3</sup> / <sub>4</sub>	1 <sup>5</sup> / <sub>16</sub>	1 <sup>1</sup> / <sub>8</sub>	100
LTT-112	¾ EMT to ¾ liquidtight	1 <sup>3</sup> / <sub>4</sub>	1 <sup>11</sup> / <sub>64</sub>	1 <sup>1</sup> / <sub>8</sub>	50
LTT-113	1 EMT to 1 liquidtight	1 <sup>15</sup> / <sub>16</sub>	1 <sup>1</sup> / <sub>2</sub>	1 <sup>3</sup> / <sub>4</sub>	25

## EMT LOK conduit connector

#### Features and benefits:

- Simple, one-piece installation with no locknuts
- Available in insulated or non-insulated throat
- Screw designed for exceptional pullout resistance
- Captive screw ensures that the screw is intact for installation and resists backing out after installation
- Corrosion-resistant, zinc-chromatic plating
- Positive grounding
- Vibration-resistant screw design
- UL Listed and CSA certified



#### EMT LOK conduit connector – steel




Cat. No.	Description	Std. Ctn.
TC101-SC	½" Uninsulated	500
TC-102-SC	¾" Uninsulated	250
TC-701-SC	½" Insulated	500
TC-702-SC	¾" Insulated	250

UL Listing No. E16592, CSA Listing No. LR-12798.

Installation using either slotted or Phillips screwdriver head, 35-in.-lb. of torque onto the EMT.

**Note:** Excessive torque could damage EMT or housing.

## Compression connectors, couplings & capped corner couplings



#### Compression connectors – die-cast zinc

Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
<b>Non-insulated</b>				
TC-211-SC	½	1 <sup>1</sup> / <sub>4</sub>	1	500
TC-212-SC	¾	1 <sup>11</sup> / <sub>32</sub>	1 <sup>5</sup> / <sub>32</sub>	250
TC-213-SC	1	1 <sup>29</sup> / <sub>64</sub>	1 <sup>15</sup> / <sub>32</sub>	200
TC-214-SC	1 <sup>1</sup> / <sub>4</sub>	1 <sup>13</sup> / <sub>16</sub>	1 <sup>27</sup> / <sub>32</sub>	100
TC-215-SC	1 <sup>1</sup> / <sub>2</sub>	1 <sup>7</sup> / <sub>8</sub>	2 <sup>1</sup> / <sub>16</sub>	40
TC-216-SC	2	2 <sup>5</sup> / <sub>32</sub>	2 <sup>17</sup> / <sub>32</sub>	20
TC-217-SC	2 <sup>1</sup> / <sub>2</sub>	2 <sup>45</sup> / <sub>64</sub>	3 <sup>1</sup> / <sub>4</sub>	12
TC-218-SC	3	2 <sup>7</sup> / <sub>8</sub>	3 <sup>15</sup> / <sub>16</sub>	12
TC-219-SC	3 <sup>1</sup> / <sub>2</sub>	2 <sup>47</sup> / <sub>64</sub>	4 <sup>7</sup> / <sub>16</sub>	10
TC-2110-SC	4	2 <sup>13</sup> / <sub>16</sub>	4 <sup>15</sup> / <sub>16</sub>	6

#### Features and benefits:

- ½"-4" Concrete tight



Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
<b>Insulated</b>				
TC-811-SC	½	1 <sup>23</sup> / <sub>64</sub>	6 <sup>3</sup> / <sub>64</sub>	500
TC-812-SC	¾	1 <sup>15</sup> / <sub>32</sub>	1 <sup>5</sup> / <sub>16</sub>	250
TC-813-SC	1	1 <sup>35</sup> / <sub>64</sub>	1 <sup>15</sup> / <sub>32</sub>	200
TC-814-SC	1 <sup>1</sup> / <sub>4</sub>	1 <sup>29</sup> / <sub>32</sub>	1 <sup>27</sup> / <sub>32</sub>	100
TC-815-SC	1 <sup>1</sup> / <sub>2</sub>	1 <sup>31</sup> / <sub>32</sub>	2 <sup>1</sup> / <sub>16</sub>	40
TC-816-SC	2	2 <sup>1</sup> / <sub>4</sub>	2 <sup>17</sup> / <sub>32</sub>	20
TC-817-SC	2 <sup>1</sup> / <sub>2</sub>	2 <sup>25</sup> / <sub>32</sub>	3 <sup>1</sup> / <sub>4</sub>	12
TC-818-SC	3	2 <sup>31</sup> / <sub>32</sub>	3 <sup>15</sup> / <sub>16</sub>	12
TC-819-SC	3 <sup>1</sup> / <sub>2</sub>	2 <sup>27</sup> / <sub>32</sub>	4 <sup>7</sup> / <sub>16</sub>	10
TC-8110-SC	4	2 <sup>29</sup> / <sub>32</sub>	4 <sup>15</sup> / <sub>16</sub>	6