

PVC-Coated Conduit Bodies and Fittings






In bulkhead and through-bulkhead styles!

Ocal® PVC-Coated Bulkhead Fittings



STTB2-G Bulkhead Fitting

STTB2-G Through-Bulkhead Fitting

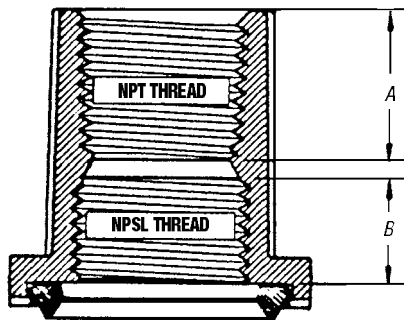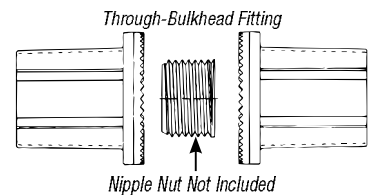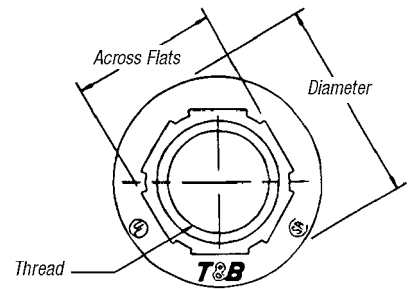

- Zinc body and locknut with thermoplastic insulating throat and nitrile sealing ring
- Nominal .040" (40 mil) PVC coating bonded to exterior — in blue, white, gray or custom colors
- Pressure-sealing sleeves protect your connections

Cat. No.	Color
STTB1 - _	
_ = space for color identifier	
G = Gray	
W = White	
B = Blue	
Custom colors also available.	

BULKHEAD FITTING CAT. NO.	THROUGH-BULKHEAD FITTING CAT. NO.	PIPE SIZE IN. METRIC SIZE DESIGNATOR*	THREAD	HEIGHT IN. MM	DIA. IN. MM	ACROSS FLATS IN. MM	"A" IN. MM	"B" IN. MM
STTB1_	STTB1_	½	½-14	1.41	1.44	1.00	.75	.50
		16	—	35.72	36.51	25.40	19.05	12.70
STTB2_	STTB2_	¾	¾-14	1.47	1.69	1.25	.78	.53
		21	—	37.31	42.86	31.75	19.84	13.49
STTB3_	STTB3_	1	1-11½	1.69	2.00	1.53	.91	.59
		27	—	42.86	50.80	38.89	23.02	15.08
STTB4_	STTB4_	1¼	1¼-11½	1.78	2.38	1.84	.91	.66
		35	—	45.24	60.33	46.83	23.02	16.67
STTB5_	STTB5_	1½	1½-11½	1.81	2.75	1.13	.91	.66
		41	—	46.04	69.85	28.58	23.02	16.67
STTB6_	STTB6_	2	2-11½	1.84	3.25	2.63	.94	.66
		53	—	46.83	82.55	66.68	23.81	16.67
STTB7_	—	2½	2½-8	2.28	3.75	3.13	1.22	.88
		63	—	57.94	95.25	79.38	30.96	22.23
STTB8_	—	3	3-8	2.56	4.38	3.78	1.19	.91
		78	—	65.09	111.13	96.04	30.16	23.02
STTB9_	—	3½	3½-8	2.56	5.00	4.28	1.38	.88
		91	—	65.09	127.00	108.74	34.93	22.23
STTB10_	—	4	4-8	2.56	5.50	4.84	1.38	.88
		103	—	65.09	139.70	123.03	34.93	22.23
STTB11_	—	5	5-8	2.72	6.63	5.91	1.47	.88
		129	—	69.06	168.28	150.02	37.31	22.23
STTB12_	—	6	6-8	3.00	7.69	7.03	1.50	.97
		155	—	76.20	195.26	178.58	38.10	24.61

* Metric size designator (ANSI C80.1-1994).
Dimensions shown are for uncoated fittings.